


SUBMITTAL SHEET

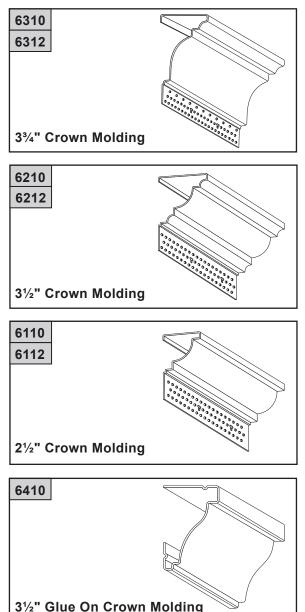

| Available Sizes & Lengths | | |
|---------------------------|--------|---------|
| Stock # | Length | Pcs/Box |
| 6310 | 10' | 8 |
| 6312 | 12' | 8 |
| 6210 | 10' | 8 |
| 6212 | 12' | 8 |
| 6110 | 10' | 15 |
| 6112 | 12' | 15 |
| 6410 | 10' | 8 |

Product(s): Crown Moldings

Description: Trim-Tex Crown Moldings are available in a variety of decorative shapes. These decorative trims add style and elegance to your interior finishes while eliminating expensive callbacks and time consuming coping.

Advantages: Qualifies for LEED® points. Designed with built in expansion control. Made from shrink, warp and mold proof PVC; unlike the properties of wood. Seemless look without the need for coping.

Limitations: Product is designed for interior use only.

Applicable Standards: Rigid PVC products made by Trim-Tex meet ASTM specifications D3678-97, D1784-03, C1047-99 and achieve a Class A rating for flame spread and smoke developed when tested under ASTM E84-10.

Surface Characteristics: Trim-Tex products are made from PVC. PVC does not support combustion and is self extinguishing when the source of flame or heat is removed.

Installation: Cut the bead to length and dry fit. Install with Trim-Tex 847 Spray Adhesive, #700 / 710 Adhesive Caulk and $\frac{1}{2}$ " divergent staples. Detailed installation and miter instructions are included with each product.

Finishing: Use #700 Adhesive Caulk to install. To improve the bondability of drywall compounds, textures, & plaster products to any bead, use MUD-MAX Drywall Compound Additive. Priming is not required. Always use a high quality paint. North Safety Products are distributed by Trim-Tex.

Job Name

| Contractor | Date |
|----------------------|-------------------|
| Approvals (Sign | atures or Stamps) |
| Caulk along top edge | Caulk Butt Joints |

Caulk Mitered Corners

Mud - Sand - Paint