

Ecophon®

Advantage™ E/15, E/24
VOC Compliant

LOW
VOC

\$\$\$




LEED® v4

- MR: Environmental Product Declarations (EPDs)
- MR: Sourcing Raw Materials
- MR: Material Ingredients (HPDs)
- IEQ: Daylight
- IEQ: Low-Emitting Materials
- IEQ: Prereq. Min. Acoustic Performance (Schools)
- IEQ: Acoustic Performance
- MR: PBT Source Reduction (Healthcare)
- IEQ: Interior Lighting
- EA: Prereq. Min. Energy Performance
- EA: Optimize Energy Performance
- Recycled Content
Pre: **1%** | Post: **70%**

TOOLS

Visit CertainTeed.com/Ceilings
Download HPDs and EPDs
LEED® Information / BIM Objects
3-Part Specs / Data Pages

EPD®

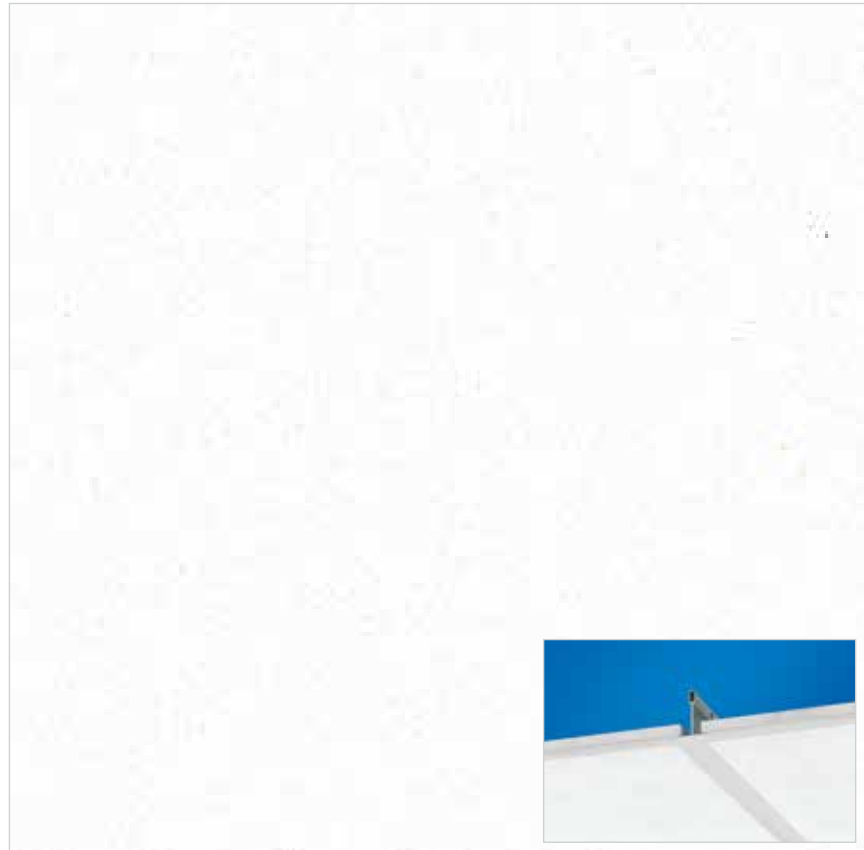

FEATURES & BENEFITS

- Exclusive 3RD™ technology combines high recycled glass content with a renewable plant-based binding agent, completely replacing traditional petroleum-based binding
- Extremely low particle emissions
- Superior sound absorption can help meet ANSI S12.60 classroom acoustic guidelines
- Smooth, monolithic surface appearance
- Sag and mold resistant
- Painted, damage-resistant reveal edges

APPLICATIONS

- Offices
(walls to deck)
- Education
(walls to deck)
- Libraries
- Other Commercial Buildings / Space Applications

AVAILABLE EDGE DETAILS



Narrow Reveal
9/16 (E15)












Reveal
15/16 (E24)



Advantage™ E/15 Narrow Reveal (3545 1605)

ATTRIBUTES

| | DIMENSIONS (INCHES) | EDGE DETAIL |  NRC |  CAC |  SAG RESISTANT |  MOLD RESISTANT |  LR |  WASHABLE |  FIRE CLASS (ASTM E1264) |  LOW VOC EMISSION COMPLIANT |  RECYCLED CONTENT | |
|------------------------|------------------------|----------------|---|---|--|---|--|--|--|--|---|--|
| ADVANTAGE™ E/15 | | | | | | | | | | | | |
| 3545 1957 | 24 x 24 x 9/16 | Narrow Reveal | 0.85 | 18 | Yes | Inherent | 0.83 | — | Class A | Certified | 71% | |
| 3545 1958 | 24 x 48 x 9/16 | Narrow Reveal | 0.85 | 18 | Yes | Inherent | 0.83 | — | Class A | Certified | 71% | |
| ADVANTAGE™ E/24 | | | | | | | | | | | | |
| 3545 1955 | 24 x 24 x 9/16 | Reveal | 0.85 | 18 | Yes | Inherent | 0.83 | — | Class A | Certified | 71% | |
| 3545 1956 | 24 x 48 x 9/16 | Reveal | 0.85 | 18 | Yes | Inherent | 0.83 | — | Class A | Certified | 71% | |

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

PHYSICAL DATA

MATERIAL

Fiberglass

ASTM E1264 CLASSIFICATION

Type XII, Form 2, Pattern G

FIRE CLASS (ASTM E1264)

Tested according to ASTM E84 & CAN S102
Flame Spread: 25 or less
Smoke Developed: 50 or less

VOC EMISSIONS

Independently certified compliant with California
Department of Public Health CDPH/EHLB/Standard
Method Version 1.1, 2010.

MOLD/MILDEW RESISTANCE

Fiberglass substrate is inherently resistant to the growth
of mold and mildew.

MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment.

WARRANTY

10-year Ecophon® Warranty

Technical Support | certainteed.com/ceilings 800-233-8990

© 01/17 CertainTeed Corporation

CertainTeed
SAINT-GOBAIN
Ceilings