

# PERFORMA®

Baroque™  
VOC Compliant

LOW  
VOC

\$\$\$\$

LEED® v4

LEED® v4

● MR: Environmental Product Declarations (EPDs)

● MR: Sourcing Raw Materials

● MR: Material Ingredients (HPDs)

● IEQ: Daylight

● IEQ: Low-Emitting Materials

● IEQ: Prereq. Min. Acoustic Performance (Schools)

● IEQ: Acoustic Performance

● MR: PBT Source Reduction (Healthcare)

● IEQ: Interior Lighting


● EA: Prereq. Min. Energy Performance

● EA: Optimize Energy Performance

Recycled Content  
● CLASS A Pre: **33%** Post: **0%**  
PROTECTONE® Pre: **45%** Post: **0%**

## TOOLS

Visit [CertainTeed.com/Ceilings](http://CertainTeed.com/Ceilings)  
Download HPDs and EPDs  
LEED® Information / BIM Objects  
3-Part Specs / Data Pages

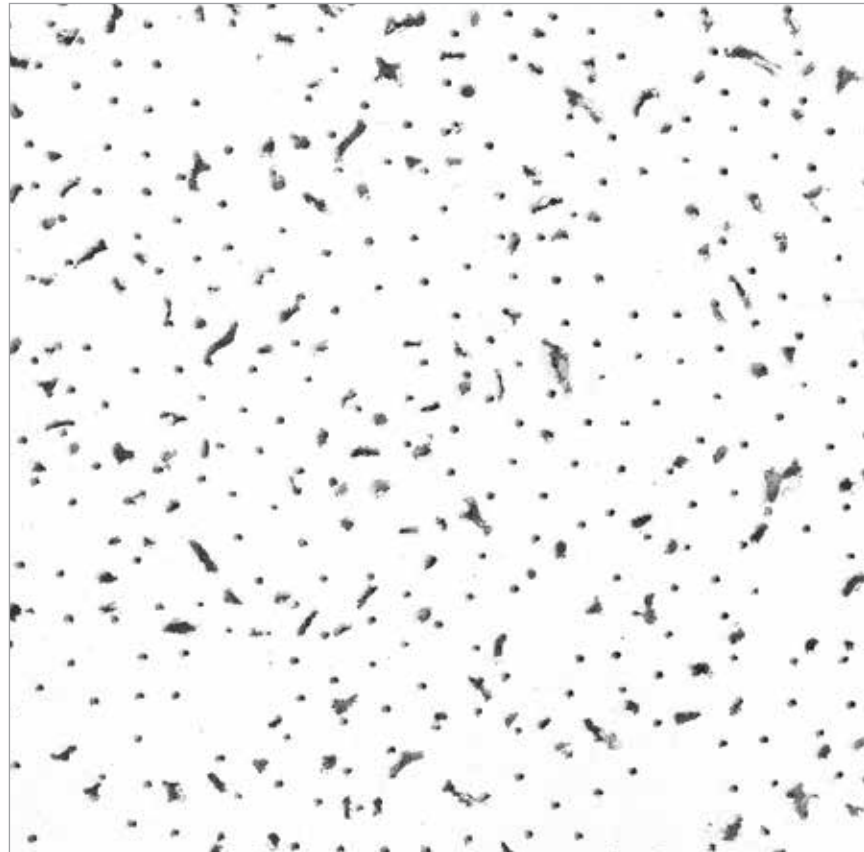

## FEATURES & BENEFITS

- 100% non-directional fissured pattern
- Higher sound absorption than comparable products
- Third-party verified Environmental Product Declaration (EPD) available for this product
- Available in fire-rated (Protectone®) version
- Health Product Declaration (HPD) available for this product

## APPLICATIONS

- Utility Areas
- Retail Warehouses
- Strip Malls
- Commercial Interior Spaces
- Offices
- Other Commercial Buildings / Space Applications



Carbon Footprint Reduction  
Rapidly Renewable Resource Content  
Recycled Content



EPD Available



HPD Available

## AVAILABLE EDGE DETAILS



Trim  
15/16 Grid



Reveal  
Beveled  
15/16 Grid



Narrow Reveal  
Corner Bevel  
9/16 Grid



Narrow Reveal  
Corner Bevel  
9/16 Grid Bolt Slot



Narrow Reveal  
Corner Bevel  
9/16 Grid Tier Drop



Baroque™ Reveal (BET-154)

## ATTRIBUTES

	DIMENSIONS INCHES	EDGE DETAIL	UL CLASSIFIED NRC	CAC	EPD AVAILABLE	HPD AVAILABLE	SAG RESISTANT	MOLD RESISTANT	LR	WASHABLE	FIRE CLASS ASTM E1264	EMISSION COMPLIANT	RECYCLED CONTENT
<b>BAROQUE™</b>													
<b>BET-157</b>	24 x 24 x 5/8	Trim	0.55	33	Yes	Yes	—	—	0.83	—	Class A	Certified	33%
<b>PBT-157</b>	24 x 24 x 5/8	Trim	0.55	35	Yes	Yes	—	—	0.83	—	Protectone*	Certified	45%
<b>BET-154</b>	24 x 24 x 5/8	Reveal	0.55	33	Yes	Yes	—	—	0.83	—	Class A	Certified	33%
<b>PBT-154</b>	24 x 24 x 5/8	Reveal	0.55	35	Yes	Yes	—	—	0.83	—	Protectone*	Certified	45%
<b>BET-150</b>	24 x 24 x 5/8	Narrow Reveal	0.55	33	Yes	Yes	—	—	0.83	—	Class A	Certified	33%
<b>BET-197</b>	24 x 48 x 5/8	Trim	0.55	35	Yes	Yes	—	—	0.83	—	Class A	Certified	33%
<b>PBT-197</b>	24 x 48 x 5/8	Trim	0.55	40	Yes	Yes	—	—	0.83	—	Protectone*	Certified	45%
<b>BET-194</b>	24 x 48 x 5/8	Reveal	0.55	35	Yes	Yes	—	—	0.83	—	Class A	Certified	33%
<b>BET-2067</b>	20 x 60 x 5/8	Trim	0.55	35	Yes	Yes	—	—	0.83	—	Class A	Certified	33%

## BAROQUE™ - METRIC

<b>BET-2067M</b>	(500 x 1500 x 15)	Trim	0.55	35	Yes	Yes	—	—	0.83	—	Class A	Certified	33%
------------------	-------------------	------	------	----	-----	-----	---	---	------	---	---------	-----------	-----

\*Protectone\*: A fire-resistive ceiling when used in applicable UL assemblies.

**CAN'T FIND A SIZE?** Contact your local Sales Representative or call 800-233-8990

## PHYSICAL DATA

### MATERIAL

Mineral Fiber

### ASTM E1264 CLASSIFICATION

Type III, Form 2, Pattern C D

### FIRE CLASS (ASTM E1264)

Tested according to ASTM E84 & CAN S102

Flame Spread: 25 or less

Smoke Developed: 50 or less

### VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010.

### MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment.

### WARRANTY

1-year Limited Warranty