

PERFORMA®

Baroque[™] Customline[®] VOC Compliant







LEED® v4

- MR: Environmental Product Declarations (EPDs)
- MR: Sourcing Raw Materials
- MR: Material Ingredients (HPDs)
- IEQ: Daylight
- IEQ: Low-Emitting Materials
- IEQ: Prereq. Min. Acoustic Performance (Schools)
- IEQ: Acoustic Performance
- MR: PBT Source Reduction (Healthcare)
- IEQ: Interior Lighting
- EA: Prereq. Min. Energy Performance
- EA: Optimize Energy Performance
- Recycled Content Pre: **33%** | Post: **0%** PROTECTONE® Pre: 45% | Post: 0%

TOOLS

Visit CertainTeed.com/Ceilings Download HPDs and EPDs LEED® Information / BIM Objects 3-Part Specs / Data Pages




Carbon Footprint Reduction Rapidly Renewable Resource Content Recycled Content



EPD Available



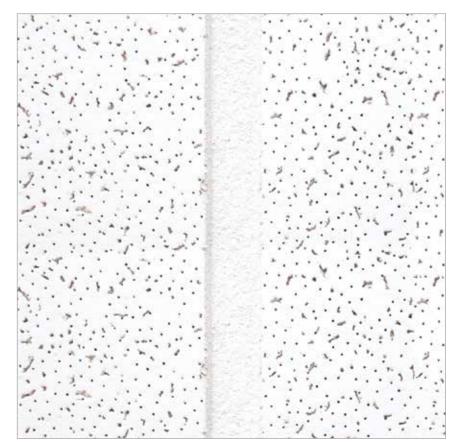

FEATURES & BENEFITS

- Three geometric designs with 100% non-directional fissured pattern
- Clean, three-dimensional face-scoring
- Available in fire-rated (Protectone®) version
- Third-party verified Environmental Product Declaration (EPD) available for this product
- Health Product Declaration (HPD) available for this product

APPLICATIONS

- Utility Areas
- Retail Warehouses
- Strip Malls
- Commercial Interior Spaces
- Offices
- Other Commercial Buildings / Space Applications

AVAILABLE EDGE DETAILS

















Baroque™ Customline® Reveal (BQCL-224)

Baroque Customline Reveal (BQCL-448)

Baroque Customline Reveal (BQCL-812)

ATTRIBUTES			*	()(v	EPD	HPD	1			O	*	LOW	0
	DIMENSIONS (INCHES)	EDGE DETAIL	UL CLA NRC	SSIFIED CAC	EPD AVAILABLE	HPD AVAILABLE	SAG RESISTANT	MOLD RESISTANT	LR	WASHABLE	FIRE CLASS (ASTM E1264)	EMISSION COMPLIANT	RECYCLED CONTENT
BAROQUE™ CUSTOMLINE®													
BQCL-224	24 × 48 × 3/4	Reveal	0.55	35	Yes	Yes	Yes	_	0.83	_	Class A	Certified	33%
PBQCL-224	24 x 48 x 3/4	Reveal	0.50	40	Yes	Yes	Yes	_	0.83	_	Protectone*	Certified	45%
BQCLN-224	24 x 48 x 3/4	Narrow Reveal	0.55	35	Yes	Yes	Yes	_	0.83	_	Class A	Certified	33%
BQCL-448	24 x 48 x 3/4	Reveal	0.50	35	Yes	Yes	Yes	_	0.83	_	Class A	Certified	33%
BQCLN-448	24 x 48 x 3/4	Narrow Reveal	0.50	35	Yes	Yes	Yes	_	0.83	_	Class A	Certified	33%
BQCL-812	24 × 48 × 3/4	Reveal	0.50	35	Yes	Yes	Yes	_	0.83	_	Class A	Certified	33%
BQCLN-812	24 x 48 x 3/4	Narrow Reveal	0.50	35	Yes	Yes	Yes	-	0.83	-	Class A	Certified	33%

^{*}Protectone®: A fire-resistive ceiling when used in applicable UL assemblies.

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

PHYSICAL DATA

MATERIAL

ASTM E1264 CLASSIFICATION

Type III, Form 2, Pattern C D K

FIRE CLASS (ASTM E1264)
Tested according to ASTM E84 & CAN S102 Flame Spread: 25 or less Smoke Developed: 50 or less

VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010.

MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment.

10-year 104/90 Limited Warranty

