




# STRAIT-FLEX® OUTLET PATCH

## ELECTRICAL OUTLET PATCH

### DATA SHEET

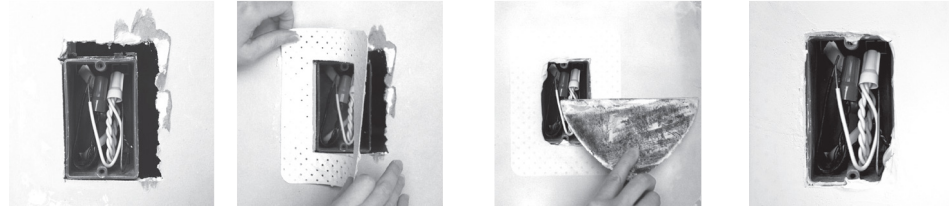

#### DESCRIPTION

- Measures 160 mm (6-1/4") x 203 mm (4-3/4"), 0.3 mm (0.011") thick
- Manufactured from a patented PVC fiber composite material
- Will not fuzz-up during sanding
- Pre-cut to fit standard receptacle boxes
- Designed to repair and reinforce miscuts or damaged areas around receptacle boxes

#### ADVANTAGES

- Pre-cut to fit standard receptacle boxes
- Repairs and reinforces miscut or damaged areas around receptacle box
- Very fast, extremely strong
- Easily installs using standard drywall compounds
- Waterproof, rustproof

#### LIMITATIONS

- Not for use with solvents or solvent-based paints that could degrade the adhesive
- Maintain 13 °C (55 °F) minimum temperature within the building during and after installation

#### PACKAGING

- Available in 50 cards of 2 (OP-2PK)

#### DIRECTIONS

To apply, lightly sand area to be repaired. Apply drywall compound 3.2 mm (1/8") thick directly to back of patch. Place patch over center of repair and wipe down flat to wall using joint knife. Immediately skim-coat patch and let dry. Compound that remains on backside of Strait-Flex® Outlet Patch makes patch very rigid in the damaged area. Apply second coat, let dry and sand.

#### WARRANTY

When applied to a sound structure using recommended application instructions, this product is backed by Strait-Flex Limited Warranty against edge cracks or flange deformations. Strait-Flex products withstand reasonable forces that cause edge cracking and flange deformation. Warranty does not apply to impacts. Refer to Strait-Flex Limited Warranty for complete warranty details.

#### STORAGE

Store in a dry place protected from moisture.

#### PRODUCT INFORMATION

See [cgcinc.com](http://cgcinc.com) for the most up-to-date product information.

#### NOTE

Products described here may not be available in all geographic markets. Consult your CGC sales office or representative for information.

#### TRADEMARKS

The trademarks CGC, STRAIT-FLEX, THE CGC LOGO, and related marks are trademarks of USG Corporation or its subsidiaries or its affiliates.

#### NOTICE

We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused

by application of these goods not in accordance with current printed instructions or for other than the intended use. Our liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days from date it was or reasonably should have been discovered.

#### SAFETY FIRST!

Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read MSDS and literature before specification and installation.

