




# STRAIT-FLEX® WIDE-FLEX<sup>400</sup> PAPER-FACED COMPOSITE DRYWALL TAPE

## DATA SHEET

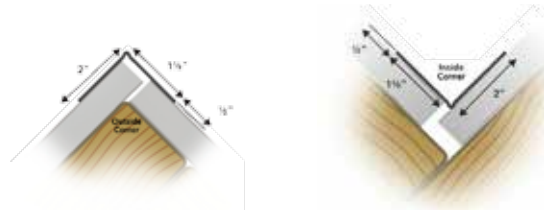

### DESCRIPTION

- Measures 102 mm (4") wide
- Designed for off angles and 90° corners with large framing irregularities and gaps
- Highly recommended for hard to straighten vaulted ceilings and butterfly vaults
- Use to replace damaged metal corner bead
- Measurements printed in Metric and Imperial
- Printed center line for easy alignment

### ADVANTAGES

- Memory-free hinge allows for ease of installation and straight, perfect corners
- Diamond punched edging allows for easier feathering, faster drying and the highest bonding strength
- Laminated nose ensures perfect corners without fuzz-up during finishing
- Cuts easily with knife or scissors
- No cracks - No callbacks
- Rustproof

### LIMITATIONS

- Not for use with solvents or solvent-based paints that could degrade the adhesive
- Maintain 13 °C (55 °F) minimum temperature within the building during and after installation

### PACKAGING

- Available in 100 ft rolls
- 7 rolls per case (WF-100C)

### INSTALLATION

Cut Strait-Flex® Wide-Flex<sup>400</sup> Tape to desired length. Fold in half at center crease to desired angle. Using a 5" or 6" taping knife, apply a liberal coat of all-purpose joint compound to inside or outside corners. Press Strait-Flex Wide-Flex<sup>400</sup> Tape into wet compound. Adjust if necessary to create a straight line. Wipe down with knife with additional pressure to the outer edge of Strait-Flex Wide-Flex<sup>400</sup> Tape. Immediately apply light skim coat of joint compound and let dry. Apply final coat, let dry and sand.

### WARRANTY

When applied to a sound structure using recommended application instructions, this product is backed by Strait-Flex Limited Warranty against edge cracks or flange deformations. Strait-Flex products withstand reasonable forces that cause edge cracking and flange deformation. Warranty does not apply to impacts. Refer to Strait-Flex Limited Warranty for complete warranty details.

### STORAGE

Store in a dry place protected from moisture.

#### PRODUCT INFORMATION

See [cgcinc.com](http://cgcinc.com) for the most up-to-date product information.

#### NOTE

Products described here may not be available in all geographic markets. Consult your CGC sales office or representative for information.

#### TRADEMARKS

The trademarks CGC, STRAIT-FLEX, THE CGC LOGO, and related marks are trademarks of USG Corporation or its subsidiaries or its affiliates.

#### NOTICE

We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused

by application of these goods not in accordance with current printed instructions or for other than the intended use. Our liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days from date it was or reasonably should have been discovered.

#### SAFETY FIRST!

Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read MSDS and literature before specification and installation.

