




CGC SHEETROCK® BRAND PAPER-FACED METAL DRYWALL BEADS AND TRIMS

DATA SHEET

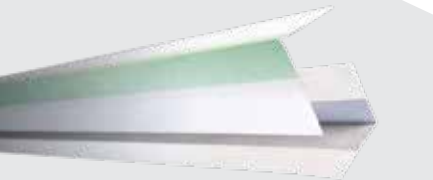

DESCRIPTION

CREATE BEAUTIFUL, PROBLEM FREE CORNERS ECONOMICALLY

- Fast, easy application to reduce labour costs
- Crack resistance to cut down on costly callbacks
- Paper covering to ensure smooth, beautiful corners
- Variety of styles to permit design flexibility

CGC Sheetrock® Brand Paper-Faced Metal Drywall Beads and Trims include a full range of high-quality products in shapes and sizes designed to meet any decorating need. Made with a strong paper tape laminated to a sturdy, rust-resistant metal form, CGC Sheetrock® Paper-Faced Metal Drywall Beads and Trims resist edge cracking and chipping. The coated paper tape covering ensures excellent adhesion of joint compound for a strong, smooth finish. No nailing is required with the tape on styles, making installation and precision corner alignment easier while eliminating nail pops. The superior performance of CGC Sheetrock® Paper-Faced Metal Drywall Beads and Trims provides both long-lasting beauty and cost-effective installation.

LIMITATIONS

1. Not recommended for veneer plaster applications.

CERTIFICATION

All CGC Sheetrock® Paper-Faced Metal Drywall Beads and Trims (with the exception of Santa Fe™ tape-on 3/4" outside bullnose bead, Santa Fe™ N nail-on 3/4" outside bullnose bead, B1 tape-on super wide outside bead, Ultrabeed nail-on outside bead, B9J tape-on 1/2" and 5/8" J trim and flex metal tape) meet or exceed ASTM C1047, *Standard Specification for Accessories for Gypsum Panels*, which "covers accessories used in conjunction with assemblies of gypsum panel to protect edges and corners and to provide architectural features."

WARRANTY

CGC Sheetrock® Brand Paper-Faced Metal Drywall Tape on bead and trim is backed by a lifetime warranty. When applied to a sound structure using recommended application techniques, we warrant that this product will not edge crack for the lifetime of the structure. Note that inside offset corners applied horizontally and nail-on paper-faced bead cannot be guaranteed against edge cracking.

DIRECTIONS

1. Apply Ready-Mixed Joint Compound or Setting-Type Joint Compound to both sides of corner, extending 50 mm (2") on each side for outer corners, 38 mm (1-1/2") for inside corners. Cut bead to desired length; align tight to ceiling and press firmly with fingers along length of corner to set. Do not bend bead. Run taping knife over corner at a 45° angle with even pressure. Remove excess compound using knife to eliminate air bubbles under paper. Allow to dry.
2. For outer corners, apply another coat of joint compound to both sides, feathering out 125 mm to 150 mm (5" to 6") on each side. Let dry; sand lightly as necessary. For inner corners, apply fill coat to one side, feathering out 25 mm (1"). Let dry. Apply fill coat to other side using same procedure. Let dry. Sand lightly where necessary.
3. For outer corner, apply finishing coat, feathering 203 mm (8") from nose of bead. Draw knife along one side of bead with one edge resting on nose of bead and other on surface of panel. Repeat for other side. Let dry. Sand and prime. For inner corners, apply finishing coat to one side, feathering 25 mm (1") past previous coat. Let dry. Apply finishing coat to other side. Let dry. Sand and prime.

L-TRIM INSTALLATION

L-Trim is installed in a similar manner to outside corners, except that only one side is finished.

NAIL ON BEAD AND TRIM INSTALLATION

Where mechanical fastening is desired, use CGC Sheetrock® Brand Paper-Faced Nail-On Bead and Trim. Install by applying staples, screws or nails. Finishing is then done as described above for tape on bead and trim, inside or outside corners.

STORAGE

Store in dry place protected from moisture. Avoid bending or other damage.





PRODUCT INFORMATION

See cgcinc.com for the most up-to-date product information.

TRADEMARKS

The trademarks CGC, SHEETROCK, THE CGC LOGO, and related marks are trademarks of USG Corporation or its subsidiaries or its affiliates.

NOTE

Products described here may not be available in all geographic markets. Consult your CGC Inc. sales office or representative for information.

NOTICE

We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused

by application of these goods not in accordance with current printed instructions or for other than the intended use.

Our liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days from date it was or reasonably should have been discovered.

SAFETY FIRST!

Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read MSDS and literature before specification and installation.

