


FINE FISSURED™

Tile
medium texture

56% RECYCLED CONTENT

Calculate LEED contribution at
armstrongceilings.com/greengenie

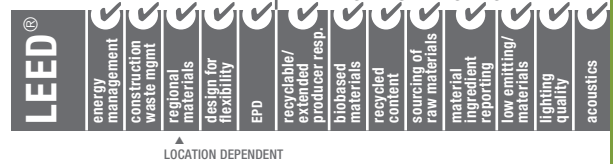

\$\$\$\$



Fine Fissured™ panels offer a non-directional visual, standard acoustics, and concealed or tongue-and-groove installation.

KEY SELECTION ATTRIBUTES

- 12" x 12" concealed tile option provides grid-hiding monolithic installation
- Non-directional visual reduces scrap and installation time
- 30-Year Limited System Warranty against visible sag, mold and mildew

TYPICAL APPLICATIONS

- Areas with low ceiling height or limited plenum

COLOR



VISUAL SELECTION

Edge Profile	Susp. Dwg. Pgs. 407-411 armstrongceilings.com/catdwgs	Item No.	Dimensions (Inches)
FINE FISSURED™ Tile			
Concealed	66	746	12 x 12 x 5/8" □
Tongue-and-Groove	63	741	12 x 12 x 1/2" □

PERFORMANCE SELECTION

Dots represent high level of performance.

UL Classified Acoustics	NRC + CAC	Total Acoustics ¹	Fire Performance	Light Reflect	Anti-Mold & Mildew	Sag Resist	Certified Low VOC Emissions	Durability	Recycled Content	Recycle Program	Warranty
					Bio-Block	Humi-Guard+					
0.55	35	—	Class A	0.85	•	•	•	Std	•	•	30-Yr
0.55	N/A	—	Class A	0.85	•	•	•	Std	•	•	30-Yr

¹ Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product. Splines not included in carton. Not recyclable when glue-up installation method is used.

SUSPENSION SYSTEM

15/16" Concealed



STAPLE UP/ADHESIVE

Tongue-and-Groove



PHYSICAL DATA

Material

Wet-formed mineral fiber

Surface Finish

Factory-applied latex paint

Fire Performance

ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less (UL labeled.)

ASTM E1264 Classification

Type III, Form 2, Pattern C E
Fire Class A

Humidity/Sag Resistance

HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Mold/Mildew Protection

Ceiling panels with BioBlock® performance resist the growth of mold and mildew.

VOC Emissions

Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

High Recycled Content

Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Insulation Value

R Factor – 1.6 (BTU units)
R Factor – 0.28 (Watts units)

30-Year Performance Guarantee & Warranty

When installed with Armstrong® Suspension System. Details at armstrongceilings.com

Weight; Square Feet/Carton

741 – 0.75 lbs/SF; 40 SF/ctn
746 – 0.90 lbs/SF; 40 SF/ctn

Minimum Order Quantity

1 carton

TechLine / 1 877 276-7876
armstrongceilings.com/commercial
(search: fine fissured)
BPCS-3822-517

LEED® is a registered trademark of the U.S. Green Building Council
UL is a registered trademark of UL LLC. All other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates
© 2016-2017 AWI Licensing LLC Printed in the United States of America

Armstrong®
CEILING & WALL SOLUTIONS

254

MINERAL FIBER