

FINE FISSURED™ Second Look®

Scored Tegular
medium texture



1761


UP TO **56%** RECYCLED CONTENT

Calculate LEED contribution at armstrongceilings.com/greengenie

- LEED®
- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/extended producer resp.
- biobased materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

LOCATION DEPENDENT

\$\$\$

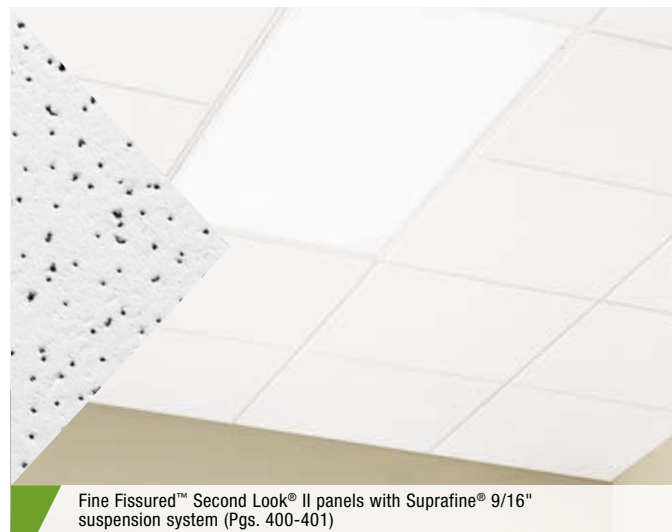

Fine Fissured™ Second Look® II panels with Suprafine® 9/16" suspension system (Pgs. 400-401)

This panel offers economical, standard acoustics and scored visuals.

KEY SELECTION ATTRIBUTES

- Geometric scored visuals
- Economical option to create a designer look

TYPICAL APPLICATIONS

- Department stores/retail
- Many types of commercial interiors

COLOR



White (WH)

FACE VIEW



Second Look I

Second Look II

Second Look III

VISUAL SELECTION

Edge Profile	Susp. Dwg. Pgs. 407-411 armstrongceilings.com/catdwgs	Item No.	Dimensions (Inches)		
FINE FISSURED™ Second Look®					
15/16" Angled Tegular		11	1760	24 x 48 x 3/4"	Second Look I
		11	1761	24 x 48 x 3/4"	Second Look II
		11	1861	24 x 48 x 3/4"	Second Look II
		11	1762	24 x 48 x 3/4"	Second Look III
9/16" Angled Tegular		27	1765	24 x 48 x 3/4"	Second Look I
		27	1766	24 x 48 x 3/4"	Second Look II

¹ Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product.

PERFORMANCE SELECTION

Dots represent high level of performance.

UL Classified Acoustics	NRC + CAC	Total Acoustics ¹	Fire Performance	Light Reflect	Anti-Mold & Mildew	Sag Resist	Certified Low VOC Emissions	Durability	Recycled Content	Recycle Program	30-yr Warranty
UL Logo			Fire Performance	Light Reflect	Bio-Block	Humi-Guard+					
0.55	35	—	Class A	0.84	•	•	•	Std	Std	•	•
0.55	35	—	Class A	0.84	•	•	•	Std	Std	•	•
0.55	35	—	Fire Guard™	0.84	•	•	•	Std	Std	•	•
0.50	35	—	Class A	0.84	•	•	•	Std	Std	•	•
0.55	30	—	Class A	0.84	•	•	•	Std	Std	•	•
0.55	30	—	Class A	0.84	•	•	•	Std	Std	•	•

SUSPENSION SYSTEMS



PHYSICAL DATA

Material
Wet-formed mineral fiber

Surface Finish
Factory-applied latex paint

Fire Performance
ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled). Fire Guard™: A fire-resistant ceiling when used in applicable UL assemblies (Class A).

ASTM E1264 Classification
Type III, Form 2, Pattern C E K
Fire Class A

Humidity/Sag Resistance

HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

VOC Emissions

Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Insulation Value

R Factor – 1.6 (BTU units)
R Factor – 0.28 (Watts units)

30-Year Performance Guarantee & Warranty

When installed with Armstrong® Suspension System. Details at armstrongceilings.com

Design Consideration

Do not mix Fine Fissured™ Second Look® panels with standard Fine Fissured panels in the same room.

Weight; Square Feet/Carton
0.75 lbs/SF; 80 SF/ctn

Minimum Order Quantity
1 carton

Metric Items Available

1761M - Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.

