

# GRAPHIS® Finetex™


Wrapped Linear,  
Cubic & NeoCubic™  
fine texture

# GRAPHIS® Rustex™

Cubic Beveled &  
Linear Beveled  
coarse texture



Graphis® Finetex™ Wrapped Linear™ panels with Suprafine® 9/16" suspension system (Pgs. 400-401)

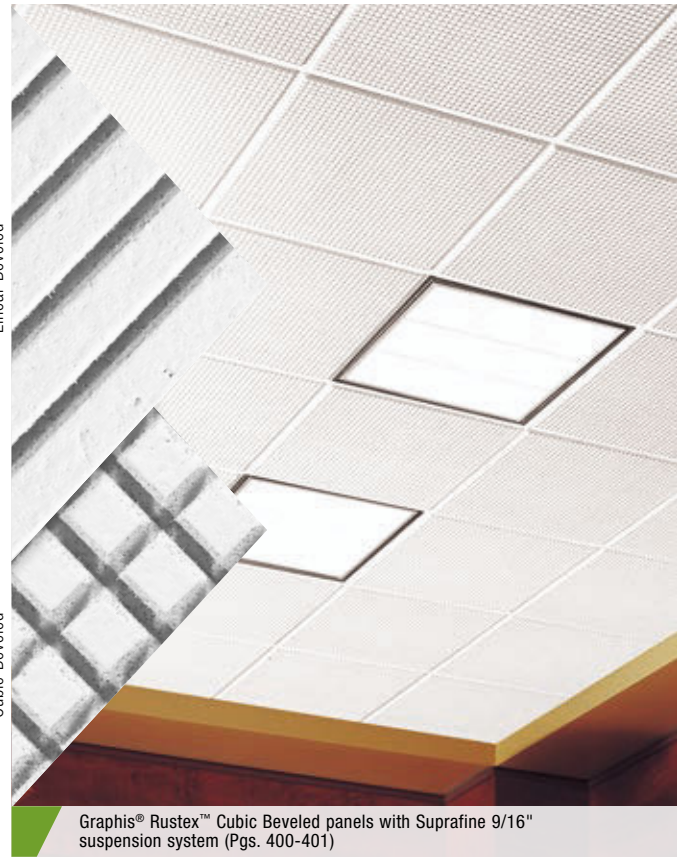

Graphis® Rustex™ Cubic Beveled panels with Suprafine 9/16" suspension system (Pgs. 400-401)

These panels offer bold geometric and linear patterns with unique visual designs.

## KEY SELECTION ATTRIBUTES

### Finetex™

- Finely sculptured geometric patterns
- Single- and multi-design options
- High light reflectance
- 30-Year Limited System Warranty

### Rustex™

- Bold geometric designs
- Good sound absorption
- 30-Year Limited System Warranty

## TYPICAL APPLICATIONS

- Department stores/retail
- Many types of commercial interiors
- Airports/bus/train stations


NOTE: Finetex panels are not recommended for areas requiring acoustical performance

## COLOR



White  
(Wh)

## DETAILS (Other Suspension Systems compatible. Refer to listing on page 266.)

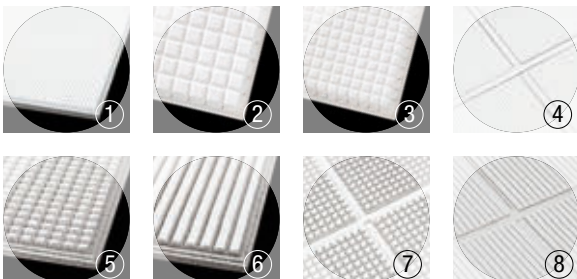

1. Graphis® Finetex™ Wrapped Linear
2. Graphis Finetex Cubic
3. Graphis Finetex NeoCubic™
4. Graphis Finetex Wrapped Linear with Suprafine 9/16" suspension system
5. Graphis Rustex Cubic Beveled
6. Graphis Rustex Linear Beveled
7. Graphis Rustex Cubic Beveled with Suprafine 9/16" suspension system
8. Graphis Rustex Linear Beveled with Suprafine 9/16" suspension system

# GRAPHIS® Finetex™ & Rustex™

Wrapped Linear™,  
Cubic & NeoCubic™  
fine texture

Cubic Beveled &  
Linear Beveled  
coarse texture

UP TO **72%** RECYCLED CONTENT




Calculate LEED contribution at [armstrongceilings.com/greengenie](http://armstrongceilings.com/greengenie)

LEED®

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/extended producer resp.
- bio-based materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

LOCATION DEPENDENT

## VISUAL SELECTION

Edge Profile	Susp. Dwg. Pgs. 407-411 <a href="http://armstrongceilings.com/catdwgs">armstrongceilings.com/catdwgs</a>	Item No.	Dimensions (Inches)
<b>GRAPHIS® Finetex</b>			
Wrapped Linear			
9/16" Wrapped Tegular	34	<b>8005</b>	24 x 24 x 3/4" □
	<b>Cubic</b>		
	36	<b>8006</b>	24 x 24 x 3/4" □
	<b>NeoCubic™</b>		
	35	<b>8007</b>	24 x 24 x 3/4" □
<b>GRAPHIS® Rustex™</b>			
Cubic Beveled			
15/16" Beveled Tegular	20	<b>2600</b>	24 x 24 x 3/4" □
	<b>Linear Beveled</b>		
	20	<b>2602</b>	24 x 24 x 3/4" □
	<b>Cubic Beveled</b>		
9/16" Beveled Tegular	33	<b>2600</b>	24 x 24 x 3/4" □
	<b>Linear Beveled</b>		
	33	<b>2602</b>	24 x 24 x 3/4" □

## PERFORMANCE SELECTION


Dots represent high level of performance.

\$\$\$

UL Classified Acoustics	Total Acoustics <sup>1</sup>	Fire Performance	Light Reflect	Anti-Mold & Mildew	Sag Resist	Durability	Recycled Content	Recycle Program	30-Yr Warranty
NRC + CAC	=		Light Reflect	Bio-Block	Humi-Guard+				
N/A	35	Class A	0.90	-	-	Std	Std	•	•
N/A	35	Class A	0.90	-	-	Std	Std	•	•
N/A	35	Class A	0.90	-	-	Std	Std	•	•
0.55	30	Class A	0.75	•	•	Std	•	•	•
0.55	30	Class A	0.75	•	•	Std	•	•	•
0.55	30	Class A	0.75	•	•	Std	•	•	•
0.55	30	Class A	0.75	•	•	Std	•	•	•

<sup>1</sup> Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product.

## SUSPENSION SYSTEMS



## PHYSICAL DATA

**Material**  
Wet-formed mineral fiber

**Surface Finish**  
Factory-applied latex paint

**Fire Performance**  
ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less (UL labeled).

**ASTM E1264 Classification**  
Type III, Form 2, Pattern J Z  
Fire Class A

**Mold/Mildew Protection** (Rustex™ only)  
Ceiling panels with BioBlock® performance resist the growth of mold and mildew.

**High Recycled Content**  
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

**Insulation Value**  
R Factor - 1.6 (BTU units)  
R Factor - 0.28 (Watts units)

**30-Year Performance Guarantee & Warranty**  
When installed with Armstrong® Suspension System. Details at [armstrongceilings.com](http://armstrongceilings.com)

**Weight; Square Feet/Carton**  
0.90 lbs/SF; 48 SF/ctn

**Minimum Order Quantity**  
1 carton

**Metric Items Available**  
2600M, 2602M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.