


# PAINTED NUBBY™

Square Lay-in & Tegular  
medium texture

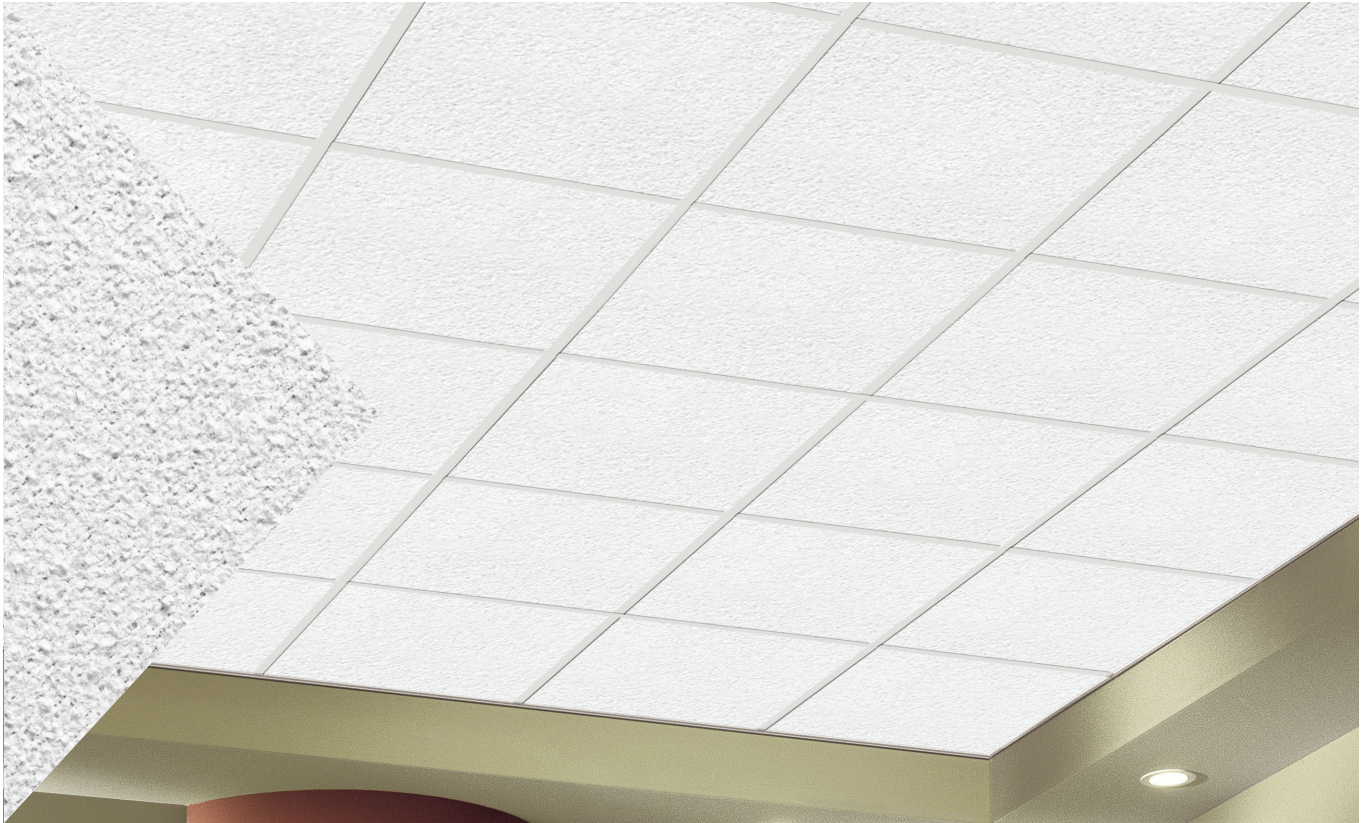

Painted Nubby™ panels with Prelude® 15/16" suspension system (Pgs. 391-392)

This panel offers excellent acoustical absorption with a medium-textured fabric visual.

## KEY SELECTION ATTRIBUTES

- Outstanding acoustical performance; both Articulation Class (180-190) and NRC (0.85-0.95)
- Fiberglass substrate resists mold and mildew
- 30-Year Limited System Warranty against visible sag, mold, and mildew

## TYPICAL APPLICATIONS


- Open plan offices used for focus, collaboration, and teaming
- Areas requiring superior acoustics and sag resistance

## COLOR



White  
(WH)

## DETAILS



1. Painted Nubby™ Tegular
2. Painted Nubby Tegular with Silhouette® 9/16" suspension system 1/4" reveal

# PAINTED NUBBY™

## Square Lay-in & Tegular medium texture

UP TO **71%** RECYCLED CONTENT





Calculate LEED contribution at [armstrongceilings.com/greengenie](http://armstrongceilings.com/greengenie)

LEED®



- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/extended producer resp.
- biobased materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

LOCATION DEPENDENT

### VISUAL SELECTION

Edge Profile	Susp. Dwg. Pgs. 407-411 <a href="http://armstrongceilings.com/catdwgs">armstrongceilings.com/catdwgs</a>	Item No.	Dimensions (Inches)
<b>PAINTED NUBBY™ Square Lay-in</b>			
15/16" Square Lay-in	1	<b>3102</b>	24 x 24 x 1" 
	1	<b>3101</b>	24 x 48 x 3/4" 
	1	<b>3103</b>	24 x 48 x 1" 
	1	<b>3104</b>	48 x 96 x 1" 
	1	<b>Other Size Panels</b>	W: 4" – 48" / L: 4" – 120" 3/4" or 1" Thick

### PAINTED NUBBY Tegular

15/16" Square Tegular	8	<b>3200</b>	24 x 24 x 1" 
9/16" Square Tegular	26, 43, 47, 51, 55	<b>3201</b>	24 x 24 x 1" 
	26, 43, 47, 51, 55	<b>Other Size Panels</b>	W: 4" – 48" / L: 4" – 120" 3/4" or 1" Thick

### PERFORMANCE SELECTION


Dots represent high level of performance.

\$\$\$

UL Classified Acoustics		Total Acoustics <sup>1</sup>	Articulation Class	Fire Performance	Light Reflect	Anti-Mold & Mildew	Sag Resist	Certified Low VOC Emissions	Durability	Recycled Content	Recycle Program	30-Yr Warranty
NRC	CAC											
0.95	N/A	-	190	Class A	0.84	•	•	-	Std	•	-	•
0.85	N/A	-	180	Class A	0.84	•	•	-	Std	•	-	•
0.95	N/A	-	190	Class A	0.84	•	•	-	Std	•	-	•
0.95	N/A	-	190	Class A	0.84	•	•	-	Std	•	-	•
N/A	N/A	-	N/A	Class A	0.84	•	•	-	Std	•	-	•
0.95	N/A	-	190	Class A	0.84	•	•	-	Std	•	-	•
0.95	N/A	-	190	Class A	0.84	•	•	-	Std	•	-	•
N/A	N/A	-	N/A	Class A	0.84	•	•	-	Std	•	-	•

<sup>1</sup>Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product.

### SUSPENSION SYSTEMS



### PHYSICAL DATA

**Material**  
Fiberglass with fabric facing

**Surface Finish**  
Factory-applied latex paint

**Fire Performance**  
ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less (UL labeled.)

**ASTM E1264 Classification**  
Type XII, Form 2, Pattern E  
Fire Class A

**Humidity/Sag Resistance**  
HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

**Mold/Mildew Protection**  
Ceiling panels with BioBlock® performance resist the growth of mold and mildew.

**High Recycled Content**  
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

**Acoustical Details**  
A CAC value of 37 can be achieved by backloading fiberglass products with Item 769 or 770.

**Insulation Value**  
3101 – R Factor - 3.0 (BTU units)  
R Factor - 0.53 (Watts units)  
3102, 3103, 3104, 3200, 3201 – R Factor - 4.0 (BTU units)  
R Factor - 0.70 (Watts units)

**30-Year Performance Guarantee & Warranty**  
When installed with Armstrong® Suspension System. Details at [armstrongceilings.com](http://armstrongceilings.com)

**Weight; Square Feet/Carton**  
3101 – 0.44 lbs/SF; 128 SF/ctn  
3102, 3103 – 0.46 lbs/SF; 96 SF/ctn  
3104 – 0.46 lbs/SF; 128 SF/ctn  
3200, 3201 – 0.55 lbs/SF; 96 SF/ctn

**Minimum Order Quantity**  
1 carton, excludes other size panels

**Metric Items Available**  
3102M, 3101M, 3103M, 3200M, 3201M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.

TechLine / 1 877 276-7876  
[armstrongceilings.com/commercial](http://armstrongceilings.com/commercial)  
(search: painted nubby)  
BPCS-3050-517

LEED® is a registered trademark of the U.S. Green Building Council  
UL is a registered trademark of UL LLC. All other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates  
© 2016-2017 AWI Licensing LLC Printed in the United States of America

**Armstrong®**  
CEILING & WALL SOLUTIONS

300

NRC  
AC  
Lighting  
Water

FIBERGLASS