

CGC ROCK FACE®

CLIMAPLUS™ PERFORMANCE



CGC Rock Face Panels/
CGC Donn DX/DXL Suspension System



Flat White
050

FEATURES AND BENEFITS

- Specially compounded textured surface with hard core.
- Perfect for increased abuse resistance and sag resistance.
- ClimaPlus™ 30-year lifetime system warranty against visible sag, mould and mildew.
- Firecode® product designed to meet life-safety codes.

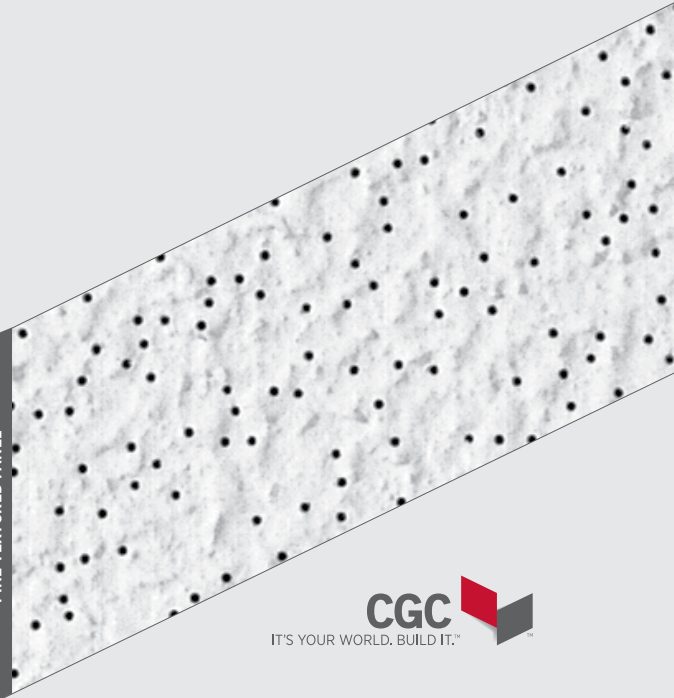
APPLICATIONS

- Athletic areas and exercise rooms
- Schools
- Corridors
- Dormitory rooms

SUBSTRATE


















- Wet-formed mineral fiber

FINE-TEXTURED PANEL



30 YEAR SYSTEM WARRANTY
• No Visible Sag
• Mould/Mildew Protection

UL Classified

Edge	Panel Size	Class ¹	Item No.	NRC	CAC Min.	LR ²	Colour	Grid Options	VOC Emissions	Anti-Mould & Mildew	Abuse-Resistant	Recycled Content ³	Panel Cost
SQ 	2' x 2' x 5/8"		56335	.55	35	.86 	White	A, B, C	Low 			48.7%	\$\$
	2' x 4' x 5/8"		56380	.55	35	.86 	White	A, B, C	Low 			48.7%	\$\$
SLT 	2' x 2' x 3/4"		55483	.55	35	.86 	White	D, E, F	Low 			48.7%	\$\$

CGC ROCK FACE PANELS


LEGEND

 **Low Emissions (VOC)**

Low-emitting performance meets CA Specification 01350 (CA Dept. of Health Services Standard Practice for the testing of VOC emissions) and is listed on the CHPS database for low-emitting materials. USG Certificate of Compliance for Low VOC Emissions also available on usg.com.







 **ClimaPlus™ Warranty Performance⁴**

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mould and mildew. Includes sag resistance performance.

 **≥ .85 LR**


 **Firecode***

GRID PROFILE OPTIONS

A	B	C	D	E	F
DX*/DXL™	DXLA™	ZXLA™	DX/DXL	DXLA	ZXLA
					

PANEL RETENTION CLIP 20428

Attaches to 1-1/2" main tees and cross tees behind lay-in ceilings. The retention clips help prevent panel displacement from incidental contact. Recommended with CGC Rock Face ceiling panels for impaction resistant systems.



See this clip and other accessories in the Accessory Guide AC2396.

PHYSICAL DATA/NOTES

Product literature
Data sheet: SC1840E

ASTM E1264 classification
Type III, Form 2, Pattern CE

ASTM E84 and CAN/ULC S102 surface burning characteristics
Class A
Flame spread: 25
Smoke developed: 50

Weight
1.0–1.3 lbs./sq. ft.

Thermal resistance
R-1.6 (5/8" panels)
R-1.9 (3/4" panels)

Maximum backloading
See Warranty for details.

Maintenance
Panels can be cleaned easily with a soft brush or vacuum.

Durability tests
ASTM D1037: Tested to 45 lbf. for a 1/4" depression by a Janka ball.
ASTM D5420: Tested to 3.5 in./lbf. for impaction.

Notes
1. Fire-rated items: see UL design details.
2. LR values are shown as averages.
3. For details, see LEED report tool at cgcdesignstudio.com.
4. For details, see Ceiling Systems Limited Warranty Commercial Applications (CSC2102) and ClimaPlus Ceilings Certification of Performance (SC2451).